




Notes:

The aggregate used can be dry sand or dry silica sand that is broadcast into the wet tackcoat until refusal.
Refer to CIM Instruction Guides for more detailed application information.

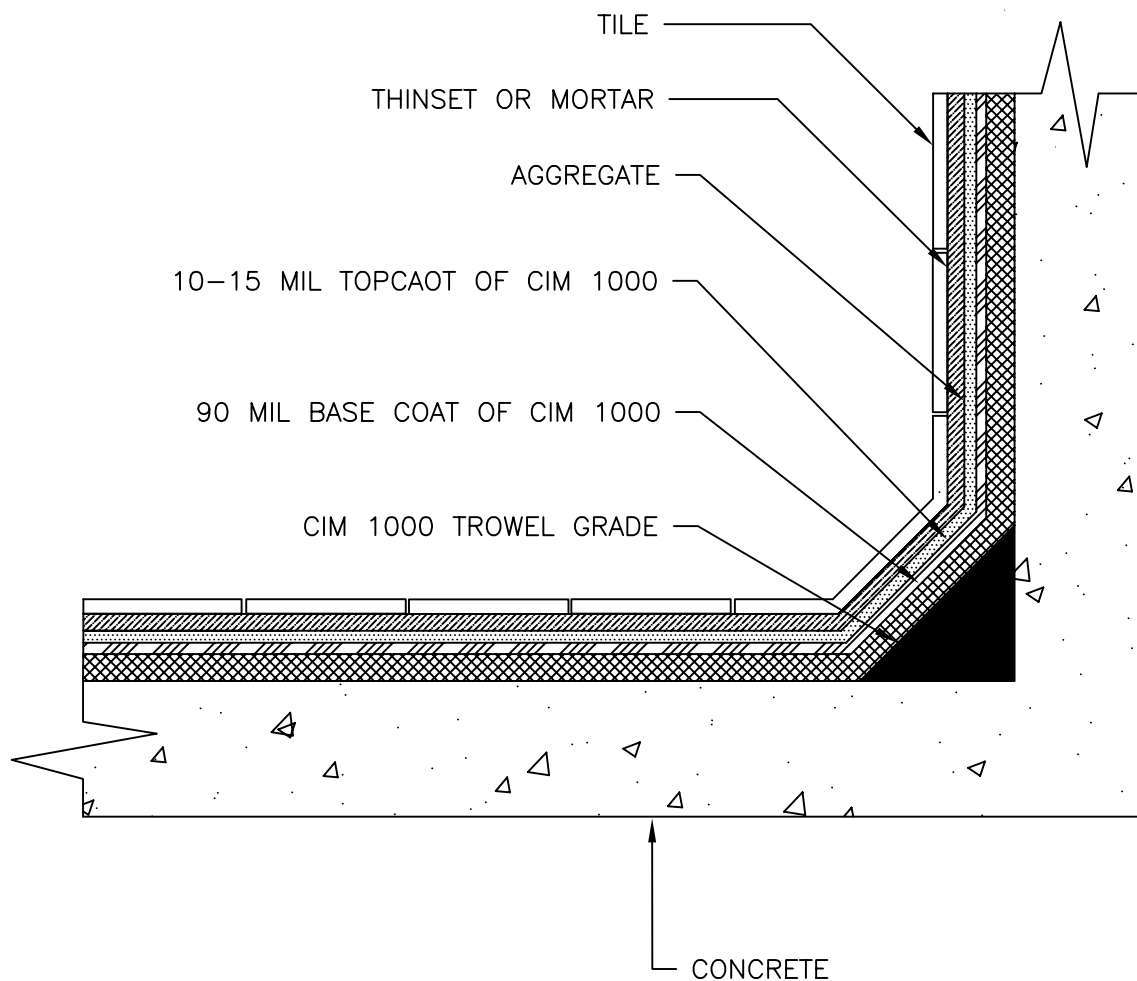

C.I.M. Industries Inc.
23 Elm Street
Peterborough, NH 03458
www.cimindustries.com
603-924-9481

DATE
09.06.07

SCALE
NTS

CIM 00-030a

PROJECT:
C.I.M. INDUSTRIES INC.

TITLE:
TILE DETAIL